



1	C86	"H": 6800 series; "L": 8080 series
2	VSS	Power ground
3	VDD	Power supply (+3.3V)
4	DB7(scl)	DATA BUS 7(serial data)
5	DB6(scl)	DATA BUS 6(serial clock)
6	DB5	DATA BUS 5
7	DB4	DATA BUS 4
8	DB3	DATA BUS 3
9	DB2	DATA BUS 2
10	DB1	DATA BUS 1
11	DB0	DATA BUS 0
12	/RD(E)	Read signal
13	/WR(R/W)	Write signal
14	A0	H:data; L: instruction
15	/RES	Reset signal
16	/CS1	Chip select
17	A	Backlight (+) +3.3V
18	K	Backlight (-)

- NOTES:
1. DISPLAY TYPE: STN, YELLOW-GREEN
 2. POLARIZER TYPE: TRANSPARENT, POSITIVE
 3. VIEW DIRECTION: 6:00
 4. OPERATING TEMPERATURE: -20°C~+70°C
 5. STORAGE TEMPERATURE: -30°C~+80°C
 6. VDD: +3.3V
 7. DRIVE METHOD: 1/64DUTY, 1/9BIAS
 8. CONTROLLER: ST7565R
 9. BACKLIGHT TYPE: YELLOW-GREEN
 10. BACKLIGHT SUPPLY VOLTAGE: +3.3V

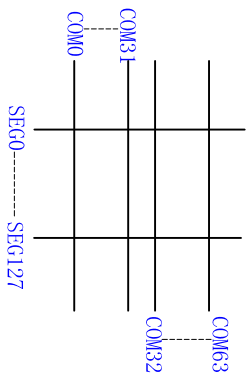

		WAYING (HONGKONG) SHARES LIMITED	
		DESIGN:	MODEL NUMBER:
CHECK:	APPROVE:	WYM12864K14	UNITS: MM
Unspecified tolerances are ±0.3		DATE: 2012-06-03	VERSION: A
		SHEET: 1 OF 1	